



Faculty of Engineering

**DESIGN AND DEVELOPMENT OF SOLAR POWERED
WIRELESS CHARGER USING INDUCTIVE COUPLING**

Rembert Micheal

Bachelor of Engineering (Hons)
Electrical and Electronics Engineering
2019

UNIVERSITI MALAYSIA SARAWAK

Grade: A-

Please tick (✓)

Final Year Project Report

Masters

PhD

DECLARATION OF ORIGINAL WORK


This declaration is made on the 23rd day of May 2019.

Student's Declaration:

I, **REMBERT MICHEAL (55005)** of **FACULTY OF ENGINEERING** hereby declare that the work entitled **DESIGN AND DEVELOPMENT OF SOLAR POWERED WIRELESS CHARGER USING INDUCTIVE COUPLING** is my original work. I have not copied from any other students' work or from any other sources except where due reference or acknowledgement is made explicitly in the text, nor has any part been written for me by another person.

30 May 2019

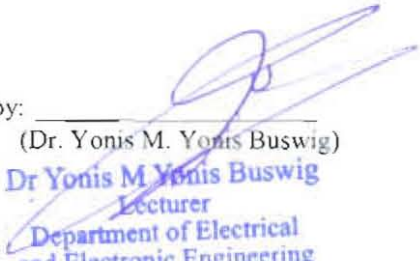
Date Submitted


Rembert Micheal (55005)

Supervisor's Declaration:

I, **DR. YONIS M. YONIS BUSWIG** hereby certifies that the work entitled **DESIGN AND DEVELOPMENT OF SOLAR POWERED WIRELESS CHARGER USING INDUCTIVE COUPLING** was prepared by the above named student, and was submitted to the "FACULTY" as a * ~~partial~~ full fulfilment for the conferment of **BACHELOR OF ENGINEERING (HONS) ELECTRICAL AND ELECTRONICS ENGINEERING**, and the aforementioned work, to the best of my knowledge, is the said student's work.

Received for examination by:


(Dr. Yonis M. Yonis Buswig)

Dr Yonis M Yonis Buswig
Lecturer

Department of Electrical
and Electronic Engineering
Faculty of Engineering
UNIVERSITI MALAYSIA SARAWAK

Date:

31/5/2019


I declare that Project/Thesis is classified as (Please tick (√)):

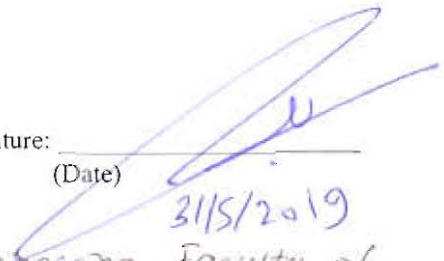
- CONFIDENTIAL** (Contains confidential information under the Official Secret Act 1972)*
- RESTRICTED** (Contains restricted information as specified by the organisation where research was done)*
- OPEN ACCESS**

Validation of Project/Thesis

I therefore duly affirmed with free consent and willingness declare that this said Project/Thesis shall be placed officially in the Centre for Academic Information Services with the abiding interest and rights as follows:

- This Project/Thesis is the sole legal property of Universiti Malaysia Sarawak (UNIMAS).
- The Centre for Academic Information Services has the lawful right to make copies for the purpose of academic and research only and not for other purpose.
- The Centre for Academic Information Services has the lawful right to digitalise the content for the Local Content Database.
- The Centre for Academic Information Services has the lawful right to make copies of the Project/Thesis for academic exchange between Higher Learning Institute.
- No dispute or any claim shall arise from the student itself neither third party on this Project/Thesis once it becomes the sole property of UNIMAS.
- This Project/Thesis or any material, data and information related to it shall not be distributed, published or disclosed to any party by the student except with UNIMAS permission.

Student signature 
(Date) 31/05/2019

Supervisor signature: 
(Date) 31/5/2019

Current Address:
Department of Electrical and Electronics Engineering, Faculty of Engineering, Universiti Malaysia Sarawak 94300 Kota Samarahan, Sarawak

Notes: * If the Project/Thesis is **CONFIDENTIAL** or **RESTRICTED**, please attach together as annexure a letter from the organisation with the period and reasons of confidentiality and restriction.

[The instrument is duly prepared by The Centre for Academic Information Services]

DESIGN AND DEVELOPMENT OF SOLAR POWERED WIRELESS
CHARGER USING INDUCTIVE COUPLING

REMBERT MICHEAL

A final year project report submitted in partial fulfilment of
the requirement for the degree of
Bachelor of Engineering (Hons) Electrical and Electronics Engineering

Faculty of Engineering
Universiti Malaysia Sarawak

2019

UNIVERSITI MALAYSIA SARAWAK

Grade: _____

Please tick (✓)

Final Year Project Report

Masters

PhD

DECLARATION OF ORIGINAL WORK

This declaration is made on the 23rd day of May 2019.

Student's Declaration:

I, **REMBERT MICHEAL (55005)** of **FACULTY OF ENGINEERING** hereby declare that the work entitled **DESIGN AND DEVELOPMENT OF SOLAR POWERED WIRELESS CHARGER USING INDUCTIVE COUPLING** is my original work. I have not copied from any other students' work or from any other sources except where due reference or acknowledgement is made explicitly in the text, nor has any part been written for me by another person.

30 May 2019

Date Submitted

Rembert Micheal (55005)

Supervisor's Declaration:

I, **DR. YONIS M. YONIS BUSWIG** hereby certifies that the work entitled **DESIGN AND DEVELOPMENT OF SOLAR POWERED WIRELESS CHARGER USING INDUCTIVE COUPLING** was prepared by the above named student, and was submitted to the "FACULTY" as a * ~~partial~~/~~full~~ **fulfilment** for the conferment of **BACHELOR OF ENGINEERING (HONS) ELECTRICAL AND ELECTRONICS ENGINEERING**, and the aforementioned work, to the best of my knowledge, is the said student's work.

Received for examination by: _____

(Dr. Yonis M. Yonis Buswig)

Date: _____

I declare that Project/Thesis is classified as (Please tick (√)):

- CONFIDENTIAL** (Contains confidential information under the Official Secret Act 1972)*
- RESTRICTED** (Contains restricted information as specified by the organisation where research was done)*
- OPEN ACCESS**

Validation of Project/Thesis

I therefore duly affirmed with free consent and willingness declare that this said Project/Thesis shall be placed officially in the Centre for Academic Information Services with the abiding interest and rights as follows:

- This Project/Thesis is the sole legal property of Universiti Malaysia Sarawak (UNIMAS).
- The Centre for Academic Information Services has the lawful right to make copies for the purpose of academic and research only and not for other purpose.
- The Centre for Academic Information Services has the lawful right to digitalise the content for the Local Content Database.
- The Centre for Academic Information Services has the lawful right to make copies of the Project/Thesis for academic exchange between Higher Learning Institute.
- No dispute or any claim shall arise from the student itself neither third party on this Project/Thesis once it becomes the sole property of UNIMAS.
- This Project/Thesis or any material, data and information related to it shall not be distributed, published or disclosed to any party by the student except with UNIMAS permission.

Student signature _____
(Date)

Supervisor signature: _____
(Date)

Current Address:

Notes: * If the Project/Thesis is **CONFIDENTIAL** or **RESTRICTED**, please attach together as annexure a letter from the organisation with the period and reasons of confidentiality and restriction.

[The instrument is duly prepared by The Centre for Academic Information Services]

ACKNOWLEDGEMENT

For his continuous guidance, a special gratitude goes towards my Final Year Project supervisor, Dr Yonis Buswig. I would like to thank him for his patience, guidance and trust towards me throughout the progress of this study.

To all my labmates for this project, thank you for your companionship throughout the year as well as for sharing the knowledge that you have with me. A heartfelt gratitude also goes towards my other classmates and closest friends in college as I could have never gone through university without your constant support. It was indeed an exhilarating experience to learn together for the past four years.

Next, my sincerest appreciation is given to all lecturers who have taught me before, for all the knowledge, advices and life lessons they have passed on. I will treasure them always. My appreciation is also extended to all who have contributed directly or indirectly during the process of completing this final year project.

To my family members, thank you for the never-ending encouragement and support all these years. I am who and where I am today because of your unconditional love. Last but not least, I am grateful to God for His blessings and grace upon me all these years.

ABSTRACT

Wireless power transmission has been commercialized for quite awhile now and since the mobile phone industry is thriving, there is a constant need in charging the mobile phone wirelessly. However, since the wireless charger was recently introduced, it comes with several limitations. One of which is the constant need to change the connections and components of the wireless charger. The changing of connections and components requires a big amount of research and this would incur additional charges to the production of these wireless chargers. Thus, this project aims to solve this problem by making modifications of the transmission coils. Through just modifications of the coil, manufacturers would be able to save a lot of manufacturing cost and this would definitely decrease its market price. So, to rectify this problem, the concept of the inductive wireless charging will be understood. Then, the characteristics of the coils will be understood by changing the parameters of the coils and then testing the charging of the mobile phone by placing the mobile phone on top of the transmission coil. Next, the transmission coils will be connected in series and parallel as well as adding magnetic sheet and tape as the magnetic shielding. The charging of the phone is observed on each of these configurations.

ABSTRAK

Transmisi kuasa tanpa wayar telah dikomersialkan dan selaras dengan perkembangan industri telefon pintar, terdapat permintaan tinggi dalam pengecasan telefon mudah alih tanpa wayar. Namun begitu, teknologi pengecas telefon mudah alih tanpa wayar ini mempunyai beberapa batasan. Salah satu daripadanya adalah keperluan dalam mengubah komponen serta sambungan komponen-komponen tersebut dalam pengecas tanpa wayar tersebut. Penukaran komponen dan sambungan akan memerlukan penyelidikan yang rapi dan ini akan menyebabkan kos pembuatan produk-produk tersebut meningkat. Oleh itu, projek ini bertujuan untuk menyelesaikan masalah ini dengan membuat pengubahsuaian pada gegelung transmisi. Pengeluar dapat minjimatkan kos pembuatan pengecas tanpa wayar tersebut hanya melalui pengubahsuaian gegelung transmisi. Sehubungan dengan itu, bagi mengatasi masalah ini, konsep pengecasan tanpa wayar secara induktif akan difahami. Setelah itu, ciri-ciri gegelung transmisi akan dipelajari melalui penukaran parameter gegelung tersebut dan kemudian, pengecasan telefon bimbit akan diperhatikan apabila telefon bimbit tersebut diletakkan di atas gegelung transmisi. Seterusnya, gegelung transmisi akan disambungkan secara siri dan selari. Di samping itu, helaian dan pita magnet akan diletakkan di bawah gegelung transmisi sebagai perisai magnetik. Akhir sekali, pengecasan telefon bimbit akan diperhati pada setiap konfigurasi gegelung transmisi.

TABLE OF CONTENTS

	Page
Acknowledgement	iii
Abstract	iv
Abstrak	v
Table of Contents	vi
List of Abbreviation	ix
List of Tables	x
List of Figures	xi
Chapter 1 INTRODUCTION	
1.1 Introduction to Wireless Charging	1
1.2 Problem Statement	2
1.3 Scope of Project	2
1.4 Objectives	3
1.5 Topic Outline	3
Chapter 2 LITERATURE REVIEW	
2.1 History of Wireless Charging	5
2.11 Theoretical Aspect	5
2.12 Technical Aspect	5
2.2 Current Technologies of Wireless Charging	6
2.3 Inductive Coupling	7
2.4 Magnetic Resonance Coupling	9
2.5 Radiofrequency (RF) Radiation	10
2.6 Architecture	11
2.61 Non-Radiative	11
2.62 Radiative	12
2.7 Rectifier	12

2.7.1	Half Wave Rectification	13
2.7.2	Full Wave Rectification	14
2.8	DC-to-DC Converter	15
2.9	Inverter	17
2.10	Magnetic Field	19
2.10.1	Magnetic Field Lines Surrounding a Loop Carrying Current	20
2.10.2	Magnetic Fields of Inductor	21
2.11	Relations between H and D	21
2.12	Inductor	22
2.13	Inductance	23
2.13.1	Factors Affecting Inductance	23
2.14	Coupling Coefficient	30
2.15	Electromagnetic Induction	30
2.16	Quality Factor	32
2.16.1	Factors Affecting Resistance of Inductor	32
2.16.2	Quality Factor Formula	34
2.17	Magnetic Shielding in Inductive Power Transfer	35
2.18	Ferromagnetic Materials	35
2.18.1	Properties of Ferromagnetic Materials	36
2.18.2	Hysteresis Loop	37
2.18.3	Curie Temperature	39

Chapter 3 METHODOLOGY

3.1	Steps Taken in Methodology	41
3.2	Methodology Flowchart	43
3.3	Conceptual System of the Project	45
3.4	Solar Cell	45
3.5	Wireless Charger PCB	46
3.6	Transmission Coil	47

3.7	Observing and Measuring Process	53
Chapter 4	RESULTS AND DISCUSSION	
4.1	Introduction	54
4.2	Instrumentation	54
4.3	Results of AC Voltage, RMS Voltage and Analysis	54
4.3.1	Varying Radius and Number of Turns of Transmission Coil	58
4.3.2	Series and Parallel Configuration	60
4.3.3	Effect of Magnetic Sheet	61
4.4	Cost comparison	63
4.5	Summary	63
Chapter 5	CONCLUSION	
5.1	Overview	65
5.2	Conclusion	65
5.3	Recommendation	66
	REFERENCES	67

LIST OF ABBREVIATIONS

AC	-	Alternating Current
DC	-	Direct Current
EMF	-	Electromotive Force
IGBT	-	Insulated-Gate Bipolar Transistor
IPT	-	Inductive Power Transfer
LED	-	Light Emitting Diode
MagMIMO	-	Magnetic Multiple Input Multiple Output
MIT	-	Massachusetts Institute of Technology
PCB	-	Printed Circuit Board
RF	-	Radio Frequency
RMS	-	Root Mean Square
SEPIC	-	Single-Ended Primary-Inductor Converter
USB	-	Universal Serial Bus

LIST OF TABLES

Table		Page
2.1	Different Types of Materials and their Corresponding Curie Temperature	38
3.1	Specifications of the Solar Cell	43
3.2	Specifications of the Wireless Phone Charger PCB	45
3.3	Transmission Coils of Different Radius and Number of Turns	46
4.1	Various Configurations of the Transmission Coils With their Respective Parameters	52
4.2	Configurations of the Transmission Coils with their Respective Observations on the Charging of the Mobile Phones	53
4.3	Configurations of the Transmission Coils with their Voltages Before and After a Mobile Phone is Placed on the Transmission Coils	54

LIST OF FIGURES

Figure		Page
2.1	Inductive Coupling	7
2.2	A Block Diagram of Non-radiative Wireless Charging System	10
2.3	Radiative Wireless Charging	11
2.4	Graph Showing Characteristic of a Diode	12
2.5	Input and Output Waveform of a Half-Wave Rectifier	13
2.6	Centre Tapped Transformer Full Wave Rectifier	14
2.7	Block Diagram of a Buck Converter	15
2.8	Block Diagram of a Boost Converter	15
2.9	Block Diagram of a Buck-Boost Converter	16
2.10	Block Diagram of a SEPIC Converter	16
2.11	The Width of the Turning On and Off of DC Voltage is Varied And the Outcome is Similar to that of a Sine Wave	17
2.12	H-Bridge Which is a Basic Topology for an Inverter	17
2.13	A Current Carrying Conductor with its Magnetic Field Generated Around it	18
2.14	Magnetic Field Lines Around a Current Carrying Loop	19
2.15	Inductors with Low (Left) and High (Right) Number of Turns	22
2.16	Inductors with Smaller (Left) and Larger (Right) Area of Coil	23
2.17	Inductors with Longer (Left) and Shorter (Right) Length of Coil	23
2.18	Inductor with an Air Core (Left) and a Soft Iron Core (Right)	24
2.19	Comparison of the Magnetic Flux between Short and Large Distance	25
2.20	Two Coils Wrapped Around a Single Iron Core	27
2.21	Electromagnetic Induction through Two Coils Wound on an Iron Ring	30
2.22	Electromagnetic Induction through Movement of Magnet through	

	A Coil or Loop	30
2.23	Circuit Representation of an Inductor	31
2.24	Direction of Electrons in Atoms of the Ferromagnetic Material Before (Left) and After (Right) Exposure to Magnetic Field	34
2.25	Curve at Which Current Flows through the Ferromagnetic Rod	36
2.26	Complete Curve When Current Flows and No Current Flows through the Rod	36
2.27	Complete Curve with Labels	37
3.1	Flowchart of Methodology	42
3.2	Conceptual Block Diagram of the Wireless Charger System	43
3.3	Complete System Used in This Project	43
3.4	Solar Cell that was Used	44
3.5	Wireless Charger PCB of a Conventional Wireless Phone Charger	44
3.6	Coils	45
3.7	Transmission Coil with Radius of 1 cm and 1 Number of Turns	45
3.8	Transmission Coil with Radius of 1.5 cm and 1 Number of Turns	46
3.9	Transmission Coil with Radius of 2 cm and 1 Number of Turns	46
3.10	Transmission Coil with Radius of 2.5 cm and 1 Number of Turns	46
3.11	Transmission Coil with Radius of 3 cm and 1 Number of Turns	47
3.12	Transmission Coil with Radius of 2 cm and 2 Number of Turns	47
3.13	Transmission Coil with Radius of 2 cm and 3 Number of Turns	47
3.14	Transmission Coil with Radius of 2 cm and 4 Number of Turns	48
3.15	Transmission Coil with Radius of 2 cm and 5 Number of Turns	48
3.16	Transmission Coil with Radius of 2 cm and 6 Number of Turns	49
3.17	Transmission Coil Connected Parallely	49
3.18	Transmission Coils Connected in Series	50
3.19	Transmission Coil with a Magnetic Sheet	50
3.20	Transmission Coil with Magnetic Tape	51
3.21	Oscilloscope Used to Measure the Voltage Across the Transmission Coil	51

4.1	Graph of Inductance (nH) vs V_{rms}	56
4.2	Graph of Radius of Transmission Coil vs V_{rms}	57
4.3	Graph of Number of Turns of Transmission Coil vs V_{rms}	57
4.4	Magnetic Flux of Transmission Coil without Magnetic Shield	61
4.5	Magnetic Flux of Transmission Coil with Magnetic Shield	62
4.6	Optimum Structure of Magnetic Shield	63

CHAPTER 1

INTRODUCTION

1.1 Introduction to Wireless Charging

Wireless charging is no longer unknown to us nowadays as the technology has been introduced to us and has been implemented all around us. Wireless charging of cars has been commercialised by Tesla; wireless charging of phones has been introduced to us and electrical stove that uses the same concept as the wireless chargers are widely used. These technologies have opened for us opportunities in making our lives better, but it is certainly not perfect. A biggest disadvantage of this technology is that it charges mobile devices slower than conventional method and this is because of the losses of energy in the form of heat [1].

Conventional power transfer for all electrical and electronic equipment does not allow full mobility of the device. The use of cords to charge them restricts the mobility of the devices and in certain cases would cause terrible incidents. It is not unheard of the news circulating regarding the sudden fires caused by faulty wires at homes and it has made us more cautious on the condition of these cords. One solution for this would be the wireless technology.

This technology enables us to transfer power through air without cords. In wireless charging, the particles are energized to produce its own oscillating field and this oscillating field will propagate through the air to the receiver. Since the oscillating field carries the energy, the circuit at the receiver will then convert the oscillating energy into electrical energy [2].

1.2 Problem Statement

In the wireless phone charger industry, there is a high demand on having a wireless charger that is able to charge multiple devices at once. In order for the manufacturers to comply with their demands, the manufacturers made changes to the PCB and the components of the wireless chargers. This would increase the cost in making these wireless chargers and these costs would be affected with the pricing of these chargers in the market.

The manufacturers would have to increase the power output of the wireless charger to charge more than one device at once. This increment in power output would require an increment in power input. Thus, the specification and ratings of the components of the wireless chargers would be changed as well. There could also be an increase in the number of components in the wireless charger PCB. Besides that, a number of tests would be conducted to ensure that the components used would comply with the projected life span of the product. These steps taken would incur additional costs in research and development of the product.

Not many manufacturers have tried in changing only the configurations of the coils of the wireless chargers. In changing the coils of the wireless charger, the manufacturers would be able to reduce the cost of production on these wireless chargers and at the same time supply the demands of the customers. Thus, it would be a great idea if changing the transmission coil of the wireless charger would be able to charge multiple devices at once.

1.3 Scope of Project

The wireless charging technology in this project will be based on the inductive coupling concept which includes the usage of transmitter and receiver coil. This method is chosen as this is the most common technology used in wireless charging.

This project focuses on increasing the power transfer of the charger so that it can charge multiple devices at once. So, the main parameters here are the quality factors, inductance, AC resistance of the transmission coils and the overall efficiency of the power transmission. Charging process is observed by charging a mobile phone using the charger and receiver coil made.

In this project, a mini solar panel will be used to supply the PCB of the wireless chargers. Then, several different configurations of transmission coils, with different number of turns and radius would be connected to the PCB. The magnetic sheet and tape would be placed behind the transmission coils to observe the charging of the mobile phone. The charging of the mobile phone will be observed based on the indicator in the mobile phone.

1.4 Objectives

- To understand how inductive power transfer works
- To understand the factors affecting the efficiency of the inductive power transmission
- To improve the current inductive power transfer method that would be able to charge multiple mobile devices at once through modification of the transmission coil

1.5 Topics Outline

The report includes five chapters and each chapter gives an insight of a specific aspect of the project. The first chapter introduces the wireless technology that has been a part of our life and their limitations. Brief introduction will also be included in this chapter where the problem statement, scope and objectives of the project will be outlined and explained. This chapter will give a brief idea on what this project is about.

Chapter two is literature review where all the subjects related to this project is explained. In this part the history of wireless charging gives the idea on how wireless charging was found and its development over the course of the years. Besides that, the different technologies used for wireless charging will also be explained. The basic working principles will also be explained. Components used in the project will thoroughly explained in this chapter so that full understanding of each technologies used will be achieved.

Chapter three is methodology where the steps taken to observe the characteristics of the conventional wireless charging pads. Besides that, the methods used to develop and

implement the improvements on the wireless charger will be explained thoroughly in this chapter. Configurations of the transmission coils will be included in this chapter.

Chapter four is the results and discussion. In this chapter, the results of the project will be listed out and will be explained in detail. Additional graphs and tables for reference are placed in the Appendix section.

Chapter five concludes the whole project and highlights the main point of the project. The recommendations are also included here in case this project is continued by other students.

CHAPTER 2

LITERATURE REVIEW

2.1 The History of Wireless Charging

2.1.1 Theoretical Aspect

A study of electromagnetism by H.C. Oersted in 1819 discovered that electric current produces magnetic field surrounding it. This investigation has led to the derivation of Faraday's Law, Biot-Savart's Law and Ampere's Law. These laws are used to describe the fundamental characteristics of magnetic field. In 1864, Maxwell's equations were derived based on these fundamental laws. Unlike the previous laws, Maxwell's equations portray how magnetic and electric fields were produced and are affected by one another. Afterward, a book published by J.C. Maxwell entitled *A Treatise on Electricity and Magnetism* in 1873 [3], brought together all investigations regarding electricity and magnetism and then concluded that these two elements are regulated by a similar force. Later, in 1884, John H. Poynting linked the Poynting Vector to the electromagnetic energy [4].

2.1.2 Technical Aspect

The possibility of wireless power transmission as an option to replace the conventional transmission line power distribution was emerging as a hot topic in the late 19th century. Both Heinrich Hertz and Nikola Tesla hypothesized the likelihood of wireless power transmission [5]. Both had their ways in proving their hypothesis. In the year 1888, H. Hertz used an oscillator to transmit electricity over a miniscule distance connected to induction coils. This was the first experiment to confirm the presence of electromagnetic radiation. Nikola Tesla, who was the founder of alternating current, started the first experiments on wireless power transfer involving microwave technology. He prioritises experiments on long-distance wireless power transfer and in he was able to realize the transfer of microwaves over a distance over the distance of about 48

kilometres. In 1899, another breakthrough was achieved by transmitting 10^8 volts of high-frequency electrical power to 200 light bulbs and an electric motor over 25 miles [6]. The technology used by Tesla, however, had to be put aside as emitting such high voltages in electric arcs would have negative implications to humans and nearby electrical equipment [7].

At the same time, Tesla also introduced his famous “Tesla Coil” which contributed greatly to the advancement of magnetic field. He then built the Wardenclyffe Tower in 1901 which can transmit electrical energy through the Ionosphere without using wires. Despite the originality his demonstrations and his personal desires in commercializing wireless power transmission, he soon ran out of funding as it was cheaper to lay copper than to build the equipment needed to transmit power by radio waves. The technical constraints during this period also contribute to the underdevelopment of its technologies [8], [9].

2.2 Current Technologies of Wireless Charging

Current wireless charging technologies can be classified into two types namely non-radiative coupling-based charging and radiative RF-based charging. Non-radiative coupling-based charging includes three techniques which are inductive coupling [10], magnetic resonance coupling [11] and capacitive coupling [12]. On the other hand, radiative RF-based charging includes directional RF power beamforming and non-directional RF power transmission [13]. For capacitive coupling, the coupling capacitance that can be achieved is dependent on the available area within the device [14]. Nonetheless, for a typical sized portable electronic device, there is a difficulty in generating sufficient power density for charging, which implies a sophisticated design limitation. In directional RF power beam forming, one restriction exists where the location of the receiver must be known by the charger with great accuracy. Thus, because of the clear restrictions of the two methods above, conventional wireless chargers normally make use of the other techniques which are magnetic resonance coupling, non-directional RF radiation and magnetic inductive coupling [9].

Magnetic resonance and magnetic-inductive coupling operate in the low distance range, where the electromagnetic field that is generated, is higher in strength and density near the transmitter or scattering objects. This near field attenuates based on the cube of

the reciprocal of the charge distance. On the other hand, the microwave radiation operates at a more prominent separation. The square of the reciprocal of the distance of the charging describes how the far-field power reduces in amplitude [15]. In the far-field method, the transmitter does not affect the retention of the radiation. However, in near-field methods, retention of the radiation influences the transmitter's load [16]. This is because, in the far-field method, the transmitter and receiving antenna are not coupled as they were in the non-radiative methods [17].

2.3 Inductive Coupling

The utilization of magnetic field induction to transmit electrical energy from one coil to another is called inductive coupling [9]. The magnetic field which is time-varying is utilized to transmit power without wires between the two coupled coils [18]. Figure 2.1 shows a model for reference. In wireless Inductive power transfer (IPT), the primary coil of a transmitter produces its own magnetic field which is constantly changing while the secondary coil would be within the magnetic field of the primary coil which is usually less than one wavelength. Then, voltage or current will be induced in the secondary coil of the receiver and the voltage can be used to charge a device or storage system wirelessly. Usually, this technology operates at frequencies within the kilohertz range [9]. The frequency of the secondary coil can be changed to the same frequency as the operation to improve the efficiency of the wireless charging [19]. Normally, the quality factor of this charger is in small values (example: below 10 [20]) as the power transmitter would decrease drastically with higher quality factor [21]. Because of the lack of compensation of high-quality factors, the effective charging distance is usually within 20 cm [19]. In spite of the restricted range of transmission, the viable power for charging wirelessly can be high [9] (example: power transmitted to charge electrical vehicles can reach up to kilowatts [22]).