

Hasmat Malik · Sukumar Mishra ·
Y. R. Sood · Atif Iqbal ·
Taha Selim Ustun *Editors*

Renewable Power for Sustainable Growth

Proceedings of ICRP 2023



Springer

About this book

The proceedings is a collection of papers presented at International Conference on Renewal Power (ICRP 2023), held during 28 – 29 March 2023 in Mewat Engineering College, Nuh, India. The book covers different topics of renewal energy sources in modern power systems. The volume focusses on smart grid technologies and applications, renewable power systems including solar PV, solar thermal, wind, power generation, transmission and distribution, transportation electrification and automotive technologies, power electronics and applications in renewable power system, energy management and control system, energy storage in modern power system, active distribution network, artificial intelligence in renewable power systems, and cyber physical systems and internet of things in smart grid and renewable power.

Editors:

- [Hasmat Malik](#),
 - [Sukumar Mishra](#),
 - [Y. R. Sood](#),
 - [Atif Iqbal](#),
 - [Taha Selim Ustun](#)
-

- Presents research works in the field of renewable power sources
 - Results of ICRP 2023 held in Nuh, India during 28 – 29 March 2023
 - Serves as a reference for researchers and practitioners in academia and industry
- Part of the book series:** [Lecture Notes in Electrical Engineering](#) (LNEE, volume 1086)
Conference series link(s): [ICRP: International Conference on Renewable Power](#)

Editors and Affiliations

- Department of Electrical Power Engineering, Faculty of Engineering, Universiti Teknologi Malaysia (UTM), Johor Bahru, Malaysia
Hasmat Malik
- Department of Electrical Engineering, Indian Institute of Technology Delhi, New Delhi, India
Sukumar Mishra

- Department of Electrical Engineering, National Institute of Technology Hamirpur, Hamirpur, India
Y. R. Sood
- Department of Electrical Engineering, Qatar University, Doha, Qatar
Atif Iqbal
- Advanced Industrial Science and Technology (FREA), Fukushima Renewable Energy Institute, Koriyama, Japan
Taha Selim Ustun

Bibliographic Information

-
- **Book Title**Renewable Power for Sustainable Growth
 - **Book Subtitle**Proceedings of ICRP 2023
 - **Editors**Hasmat Malik, Sukumar Mishra, Y. R. Sood, Atif Iqbal, Taha Selim Ustun
 - **Series Title**[Lecture Notes in Electrical Engineering](#)
 - **DOI**<https://doi.org/10.1007/978-981-99-6749-0>
 - **Publisher**Springer Singapore
 - **eBook Packages**[Energy](#), [Energy \(R0\)](#)
 - **Copyright Information**The Editor(s) (if applicable) and The Author(s), under exclusive license to Springer Nature Singapore Pte Ltd. 2024
 - **Softcover ISBN**978-981-99-6748-3Published: 04 January 2024
 - **eBook ISBN**978-981-99-6749-0Published: 02 January 2024
 - **Series ISSN**1876-1100
 - **Series E-ISSN**1876-1119
 - **Edition Number**1
 - **Number of Pages**XIX, 1023
 - **Number of Illustrations**123 b/w illustrations, 441 illustrations in colour
 - **Topics**[Energy Systems](#), [Power Electronics](#), [Electrical Machines and Networks](#), [Circuits and Systems](#), [Signal, Image and Speech Processing](#), [Power Electronics](#), [Electrical Machines and Networks](#)

Table of contents (68 papers)

Front Matter

Pages i-xix

Editorial: Renewable Power for Sustainable Growth

-
- Hasmat Malik, Sukumar Mishra, Y. R. Sood, Atif Iqbal, Taha Selim Ustun

Pages 1-29

An Efficient Algorithm for Energy Management in Smart Grid for Various Improvements

-
- Deepa Kumari, Ashish Sharma

Pages 31-43

Investigations and Validation of PV-Powered Unified Power Quality Conditioner for Electric Vehicle Smart Charger in Standard AC/DC Hybrid Microgrid Test System

-
- S. Sumana, R. Dhanalakshmi

Pages 45-60

Short-Term Electricity Load Forecasting Using Modified Hidden Markov Model

-
- Poras Khetarpal, Neelu Nagpal, Mahesh Kumar, D. Lakshmi, Neelam Kassarwani

Pages 61-74

Microgrid Systems with Classical Primary Control Techniques—A Review

-
- Sujit Kumar, H. K. Yashaswini, Naveen Sharma, Mohit Bajaj

Pages 75-83

Green Energy Solutions for Indoor Air Quality Improvement

-
- Saad Javed, Safdar Tanweer, Syed Sibtain Khalid, Naseem Rao, Jawed Ahmad, Bhavya Alankar

Pages 85-97

Data Resource Library for Renewable Energy Prediction/Forecasting

- Subeyr Bashir Ahmed, Hasmat Malik, Shahrin Md Ayob, Nik Rumzi Nik Idris, Awang Jusoh, Fausto Pedro García Márquez

Pages 99-164

Solar Rooftop On-Grid Connected Net Metering System

- Sarfraz, Anju Gupta, Rashmi Agarwal

Pages 165-176

Contemporary Maximum Power Point Tracking Methods of Solar Photovoltaic Modules

- Jyothi Tompala, Sravana Kumar Bali

Pages 177-192

Performance Analysis of Perturb & Observe and Incremental Conductance Method of Maximum Power Point Tracking in Solar PV-Based Power Generation

- Avdhesh Kumar

Pages 193-204

The Airfoil Design for Small-Scale Wind Turbines in Maximizing Renewable Wind Energy

- S. A. H. Roslan, N. Umar, Z. A. Rasid, A. K. Arifin

Pages 205-216

Comparative Study on Solar PV Module Performance with Sun Irradiance Trapping Mechanism: Power Generation Forecasting Using Machine Learning

- Rupendra Kumar Pachauri, Ashutosh Shukla, Ahmad Faiz Minai, Aryadhara Pradhan, Vinay Gupta, Mohit Kumar et al.

Pages 217-228

The Geometric Modelling and Linearization of Small-Scale Wind Turbine Blades for Optimized Renewable Energy

- S. A. H. Roslan, N. Umar, Z. A. Rasid, A. K. Arifin

Pages 229-243

Performance Analysis of H-Type Vertical Axis Wind Turbine by Using Novelty Numerical Simulink Method

- Muhammad Radhiva, Muhammad Hasya Abdillah, Geordiano Devanaldy Khresna Putra, Muhammad Raihan Wajdi, Putri Wulandari, Wahyu Caesarendra et al.

Pages 245-257

Energy Production from Various Bio-wastes Under Different Electrode and Temperature Conditions: Experimental Study

- Rahul Anand, Rupendra Kumar Pachauri, Ahmad Faiz Minai, Akhlaque Ahmad Khan, Rajesh Singh, Shashikant

Pages 259-270

Simulation and Prototype Design of Hybrid Renewable Energy Harvesting System

- Yanuar Z. Arief, Muhammad Syukri Nurulhak, Hamzah Eteruddin

Pages 271-288

Design and Development of an Inexpensive Intelligent Device for Sag Measurement for Overhead Transmission Lines

- Manoj Kumar, Aman Kumar, Tushar Tomar, Anuj Dixit, Divya Asija, R. K. Viral

Pages 289-303

Gradient Descent Back-Propagation Through Momentum (GDBPM) Endorsed \cos Control Technique-Based DSTATCOM Intended for Shunt Indemnification

- Mrutyunjaya Mangaraj, Kampara Ravisankar, Majji Satish, Kantubhukta Dinesh, A. Praveena

Pages 305-317

Improvement in Voltage Stability of the System Due to Increased Penetration of Electric Vehicles Using Distributed Solar Photovoltaic Sources

- Sheetal Deshmukh, Shirazul Islam, Atif Iqbal, Md Fahim Ansari

Pages 319-338

An Intelligent System for Furfural Estimation in the Power Transformers

- Md. Manzar Nezami, Hythem Hashem, Md. Danish Equbal, Mohammad Junaid Khan, Md. Fahim Ansari, Elfatih Elmubarak Mustafa

Pages 339-345

Design of PID-Tuned Controller for Automatic Voltage Regulator for Frequency Stability in Thermal Power Plant

- Md. Fahim Ansari, Atif Iqbal, Md. Manzar Nezami

Pages 347-354

Optimization of Distributed Generators in a Virtual Power Plan Using Mixed Integer Linear Programming Method

- Ahmed Abubakar Elwan, Mohd Hafiz Habibuddin, Yanuar Z. Arief, Siti Nur Aisyah Mohd Sharan, Ahmad Safawi Bin Mokhtar, Rasyidah Binti Mohamad Idris

Pages 355-365

Solving Unit Commitment Problem Using Mixed Integer Linear Programming for Demand Side Management

- Ahmed Abubakar Elwan, Mohd Hafiz Habibuddin, Yanuar Z. Arief

Pages 367-375

Deployment of Renewable Embedded Generation and Unified Power Quality Conditioner in Distribution System using Firefly Algorithm

- Musa Mustapha, Madihah Binti Md. Rasid, Jasrul Jamani Bin Jamian, Ganiyu Ayinde Bakare, Yau Shuaibu Haruna

Pages 377-389

Application of Wind Power in Backwashing Filter Media

- Deepak Juneja, Sushindra Kumar Gupta, Aditya Rana

Pages 391-401

Mixed Reality Accelerates the Designing Process in Automotive Industry

- Mohamad Yahya Fekri Aladin, Ajune Wanis Ismail, Fazliaty Edora Fadzli

Pages 403-415

Design and Implementation of Solar Charging Electric Vehicle

-
- Rahil Imtiyaz, Aman Kumar, Gitanjali Mehta, Ruqaiya Khanam
-

Pages 417-429

Modelling and Analysis of a Permanent Magnet DC Motor Fed Electric Vehicle Drive System

-
- K. Subbaramaiah, Ravisankar Kampara, Majji Satish, Kantubhukta Dinesh, Karthik Tamvada
-

Pages 431-440

An Overview of Electric and Hybrid Vehicle Technology

-
- V. S. Vishwanath Nagarajan, Vinay Kumar Jadoun, N. S. Jayalakshmi, Anubhav Kumar Pandey
-

Pages 441-456

Performance Analysis of Classical Converter Using Different Control Strategies for Switched Reluctance Motor with Dynamic Loading

-
- Ritika Asati, Deepak S. Bankar
-

Pages 457-467

Design and Development Gear-Electric Bike and Performance Testing for Indian Road Conditions

-
- Vinay Gupta, Jitesh Kumawat, Rupendra Kumar Pachauri, Shashikant
-

Pages 469-479

Design and Development of a Solar-Based Wireless Electric Vehicle Charging System

-
- Sanyam Jain, Samyak Jain, Sanjay Kumar, Harsh Kaushik, Neelu Nagpal, Ravi Sharma
-

Pages 481-494

Design, Optimization, and Performance Enhancement of Switched Reluctance Motor for Pollution-Free Electric Vehicle Application

-
- Kesar Ali, Arbaz Sherkhan Shaikh, Kirti Govind, Javid Navaj Shaikh, Yogesh B. Mandake, Deepak S. Bankar
-

Pages 495-512

Using Linear Regression Model to Predict the Wholesale of the Electric Car in Indonesia: What Can Be Learned from the Model?

- Rosyid R. Al-Hakim, Nur F. Soelaiman, Sri Riani, Yanuar Z. Arief

Pages 513-519

Comparison of Thermoelectric Generator with Boost Converter and Single-Ended Primary-Inductance Converter

- Megat Azri Irfan Adzmi, Mohd Zaki Daud, Shahrin Md Ayob, Razman Ayop

Pages 521-533

A Hybrid Maximum Power Point Tracking (MPPT) for Thermoelectric Generator (TEG) System

- Naseem Mohd Arshad, Mohd Zaki Daud, Shahrin Md Ayob, Razman Ayop

Pages 535-551

Thermoelectric Generator (TEG) by Using Indirect Maximum Power Point (MPP) Algorithm

- Ardrine Justin, Mohd Zaki Daud, Shahrin Md Ayob, Razman Ayop

Pages 553-568

Comprehensive Review on AC-DC, DC-DC, DC-AC-DC Converters Used for Electric Vehicles and Charging Stations

- Utkarsh Shukla, Shekhar Yadav, Nitesh Tiwari, Aayushi Priyadarshini

Pages 569-588

Control and Performance Analysis for Active Islanding Detection Using q-Axis Control in Renewable Energy Sources Based Microgrid: A Review

- Avdhesh Kumar

Pages 589-599

Harmonics Analysis of Triple-Phase Induction Motor Drive

- Mohd. Rizwan Khan, Md. Nasim Akhter, Mohd. Sartaj

Pages 601-618

Development of Witricity Based Wireless Power Transmission System

- Kanhaiya Mishra, Arjun Kushawaha, Neetigya Chaurasia, Sudhanshu Kumar, Gautam Kr. Singh, Mohammad Shahid

Pages 619-634

Analysis of Three-Winding Transformer Configurations for Energy Storageless Dynamic Voltage Restorer

- Muhammad M. Roomi, S. M. Suhail Hussain, Mohd Tariq, Taha Selim Ustun

Pages 635-648

Data Reliability Analysis for Early Fault Diagnosis of Air Handling Unit (AHU)

- Hasmat Malik, Shahrin Md Ayob, Nik Rumzi Nik Idris, Awang Jusoh, Fausto Pedro García Márquez, Abdulaziz Almutairi

Pages 649-674

Use of Solar Energy in Treatment of Pulp and Paper Industry Effluent with Hemp: An Experimental Study

- Ambika Thakur, Deepak Juneja, Yogyendra Narayan

Pages 675-687

Design of Radar-Based Portable System for Monitoring of Human Vital Signs with Renewable Energy Resources

- Pushparaj, Amod Kumar, Garima Saini

Pages 689-716

Controlling Methods of Brushless DC Motor in Electrical Vehicle Drives

- Megha Sharma, Shailly Sharma, Jayashri Vajpai

Pages 717-726

Effect of Number of Poles on IPMSM Performance for Electric Vehicle Drivetrain

- Vinod Kumar Kuttey, Sravana Kumar Bali

Pages 727-736

Offline Power Quality Management and Control Using Neural Networks

- Papia Ray, Surender Reddy Salkuti, R. Aditya Kumar

Pages 737-749

Optimized Integral Sliding Mode Load Frequency Control of an Isolated Power System

- Neelam Kassarwani, Neelu Nagpal, Jagrat Sehgal, Pierluigi Siano

Pages 751-762

Implementation of Supercapacitor-Battery-Based Energy Storage System in Hybrid Power System Incorporating Renewable Energy Resources

- Jahid, Manaullah, Sheeraz Kirmani

Pages 763-772

Hybrid Waste to Energy Electricity Generation and Battery Storage System: The Economics and Environmental Emission in a Low-Income Community

- Ahmed Abubakar Elwan, Mohd Hafiz Habibuddin, Yanuar Z. Arief, Ahmad Safawi Bin Mokhtar, Rasyidah Binti Mohamad Idris

Pages 773-783

Application of Solar Power in the Loopholes and Coverages of Buses in the Bus Rapid Transit System in Bhopal

- Rajeev Kumar, Deepak Juneja, Yogendra Narayan

Pages 785-797

Forecasting of Carbon Emissions in India Using (ARIMA) Time Series Predicting Approach

- Somesh Sharma, Amit Mittal, Manmohan Bansal, Bhagawati Prasad Joshi, Ashish Rayal

Pages 799-811

Peak Shaving Through Battery Storage for Photovoltaic Integrated Building Considering the Time of Day Pricing

- A. Sharma, P. Mahajan, R. Garg

Pages 813-825

Economic Analysis of Renewable Energy Systems for Rural Electrification

- Nikita Yadav, Rahul Sharma, Yashwant Sawle

Pages 827-836

Improved Voltage Regulation in Hybrid Photovoltaic/Wind Using Modified Dynamic Voltage Restorer with Hybrid Control Scheme

- Preeti Rani, Ved Parkash, Naveen Kumar Sharma

Pages 837-852

Contingency Analysis for a Solar Energy Generation System Using Real-Time Data Analysis

- Vishal V. Mehtre, Shivani Jitendra Khare, Swapnil Namekar, D. S. Bankar

Pages 853-866

Digital Twin in Extended Reality Applications for Industry 4.0

- Ajune Wanis Ismail, Mohamad Yahya Fekri Aladin, Nur Ameerah Abdul Halim

Pages 867-880

Deep Image Coding in the Fractional Wavelet Transform Domain based on High-Frequency Sub-bands Prediction

- Nadeem Ahmad, Zainul Abdin Jaffery, Irshad, Shaheen Khan

Pages 881-898

QIVIFS: Quaternion Approach of Interval-Valued Intuitionistic Fuzzy Sets with Applications in Renewable Energy System

- Bhagawati Prasad Joshi, Madan Mohan Sati, Sanjay Oli, Deepak Kumar, Ashish Rayal, Abhay Kumar

Pages 899-910

Feminine Protection Wearable System Based on IoT

- Shubham Kumar Verma, Udai Raj Tiwari, Utkarsh Rau, Khadim Moin Siddiqui, Sandhya Srivastava, Jayati Vaish

Pages 911-922

Marine Predictors Algorithm Optimization Technique to Estimate GMPP of PV Array Under Partial Shadowing Conditions

- Rupendra Kumar Pachauri, Rajesh Singh, Ahmad Faiz Minai, Shashikant

Pages 923-932

Artificial Intelligence-Based Bearing Fault Diagnosis of Rotating Machine to Improve the Safety of Power System

- Mohmad Iqbal, A. K. Madan

Pages 933-942

Stability Enhancement of AC Microgrid Using Discrete Mode Controllers with Optimum Sampling Frequency

- Amit Arora, Mahendra Bhadu, Arvind Kumar

Pages 943-962

Performance Analysis of Grid-Integrated Solar System Through Interlinking Converter with Control Schemes

- Preeti Rani, Ved Parkash, Naveen Kumar Sharma

Pages 963-980

Towards Achieving Net Zero Emissions in India by 2070

- Akash Midha, Anuradha Tomar

Pages 981-991

IOT-Based Monitoring and Controlling of Substation Parameters

- P. Sai Kiran, B. Venkateswara Rao, G. Satyamohan Sarveswar, P. Manikanta

Pages 993-1002

Effectiveness of Resilience Index in Assessing Power System Performance

- Hasna Satya Dini, Jasrul Jamani Jamian

Pages 1003-1019

Optimization of Distributed Generators in a Virtual Power Plan Using Mixed Integer Linear Programming Method



Ahmed Abubakar Elwan, Mohd Hafiz Habibuddin, Yanuar Z. Arief,
Siti Nur Aisyah Mohd Sharan, Ahmad Safawi Bin Mokhtar,
and Rasyidah Binti Mohamad Idris

Abstract Power utilities worldwide face capacity expansion challenges due to costs, land availability, and environmental sustainability. Increased demand and the need to build a reliable and resilient network have compelled power utilities to organize competitively distributed generators to compensate for any supply surge. These distributed power generation units are small and dispersed, making control difficult. To find a solution that is both economical and sustainable, a virtual power plant is formed from diesel generators with a capacity of 5.6 MW, a waste-to-energy (WtE) power generating plant with a capacity of 1 MW, a wind power plant with a capacity of 0.6 MW, and a photovoltaic (PV) power plants with a capacity of 0.4 MW. The distributed generators were optimally integrated into a virtual power plant and for the best integration solution, a Deming wheel, also known as the plan, do, check, and act (PDCA) method and mixed integer linear programming (MILP) were used in an Excel solver. The simulation results show that the total VPP power generated from the sources is 6.33 MW, with renewable energy sources accounting for 1.6 MW (25% of the total) and a cost estimate of 0.5\$/kW. Diesel and wind contribute the least in comparison with their capacities, while others contribute the most (100% of the capacities).

A. A. Elwan · M. H. Habibuddin · S. N. A. M. Sharan · A. S. B. Mokhtar · R. B. M. Idris
Department of Electrical Power Engineering, Universiti Teknologi Malaysia (UTM), Johor Bahru, Malaysia
e-mail: mdhafiz@utm.my

A. S. B. Mokhtar
e-mail: safawi@utm.my

R. B. M. Idris
e-mail: rasyidahidris@utm.my

Y. Z. Arief (✉)
Department of Electrical and Electronic Engineering, Faculty of Engineering, Universiti Malaysia Sarawak (UNIMAS), Kota Samarahan, Sarawak, Malaysia
e-mail: ayzulardiansyah@unimas.my

Keywords Virtual power plant · Mixed integer linear programming · Waste to energy · Distributed generator · Renewable energy

1 Introduction

With the current decentralization, deregulation, and environmental concerns in the electrical power sector, there has been a massive integration of diverse sources of electrical power into the system, making management difficult. Because they must be close to the source, most of these resources have limited capacity and are dispersed. Power system operators are investigating various options for integrating such resources, and virtual power plants (VPP) can play a significant role in integrating these dispersed low-capacity power plants into a single entity that is both secure and market competitive. This commitment should allow small players to enter the power sector [1]. However, VPPs may be required to operate at lower load factors, posing the risks of high per kWh GHG emissions and high cost per unit production, resulting in low competitiveness [2] and sector coordination. It will become even more critical in the coming years, as more renewable energies (RE) are expected to be added to the electricity grid between now and 2050 [3].

Like all other power systems, a virtual power plant schedules generators and loads in a way that allows the system operator to achieve cheap and reliable operation while maintaining competitiveness and cost. However, this is frequently challenged due to their lack of competitive capacity, remoteness, and sporadic nature [4]. More can be accomplished in a VPP by optimizing the integration of various distributed energy resources. Several researchers have conducted studies on the optimal integration of distributed energy resources in a VPP, as shown in [5–8]. VPP has been classified into two broad categories, as described in [9, 10]: commercial and technical virtual power plants (CVPP and TVPP), each with its own application and scope. Examples of these applications include reserve power, price stabilization, and so on. Zhang et al. [11] investigated optimization of VPPs, whereas [12] investigated dynamic integration and performance of dispersed resources in a VPP using both linear and nonlinear programming.

The goal of this research is to integrate distributed resources into a VPP and investigate the performance of a VPP plant to ensure adequate resource allocation to maximize capacity output while keeping costs low. The PCDA method and a mixed integer linear program (MILP) method are used in this study to optimize distributed sources. Figure 1 depicts the basic VPP configuration for the studies.

Figure 1 depicts the distributed resources, which include PV, diesel power generators, a waste-to-energy power plant, and a wind power plant. The management and resource allocation center coordinate these resources, and the power generated is fed to the various load units, as shown in Fig. 1.

To optimally integrate the distributed resources, this study employs the PDCA (Demming wheel) method Fig. 2 and a mixed integer linear program (MILP) solution. PDCA allows for significant “improvements” in performance (“breakthroughs”)

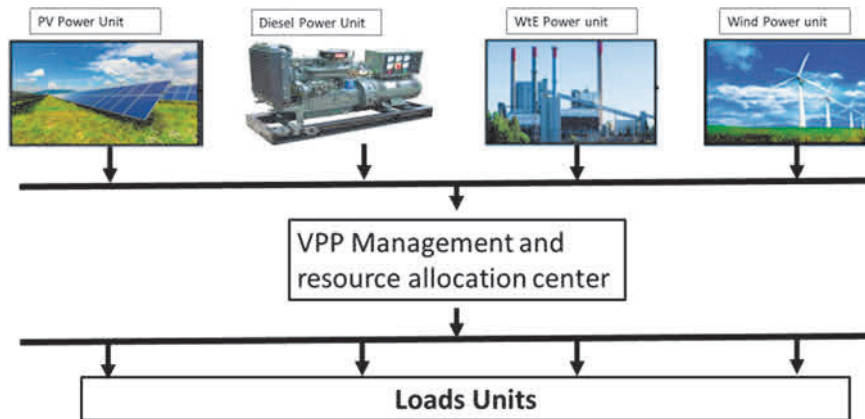
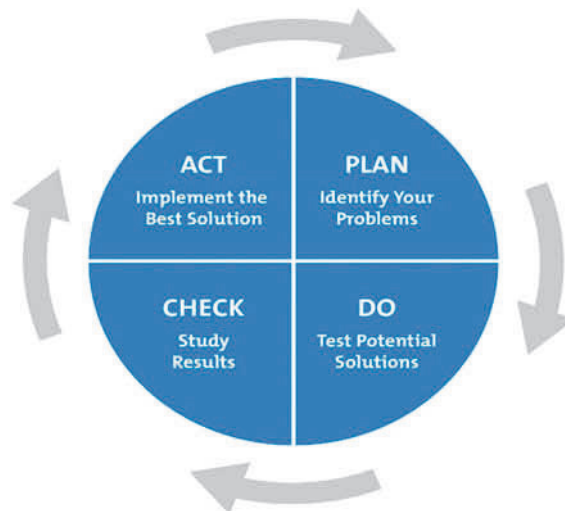


Fig. 1 VPP configuration showing the various distributed resources

[13]. While MILP is a mathematical model used to reduce risks (e.g., cost, energy loss, errors, etc.) or maximize opportunities (e.g., profit, quality, efficiency, etc.), it is subject to some constraints [14]. The study's findings are expected to be used by policymakers to encourage more participation from distributed energy resources in the power sector in a profitable and sustainable manner, reflecting the anticipated contributions from VPP plants to a sustainable energy system.

Fig. 2 PDCA cycle



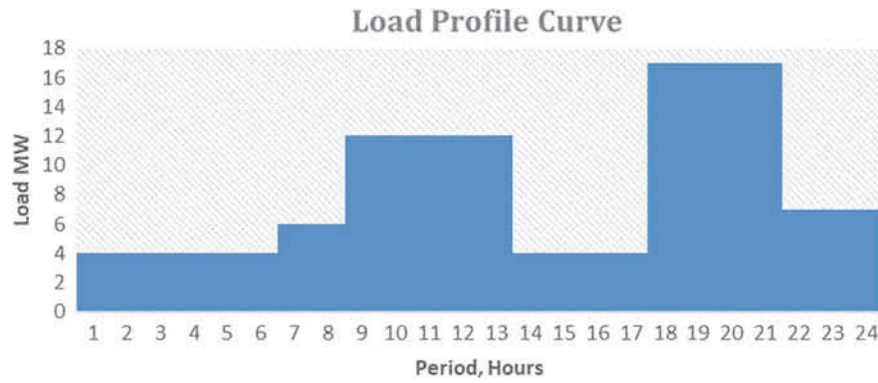


Fig. 3 Demand load profile curve

2 Proposed Method

2.1 Topology of the VPP

The VPP under consideration is a collection of distributed diesel generators (dg) and renewable energy sources (RES) units (PV and wind). WtE stands for waste-to-energy electrical generator. The goal is to create a VPP portfolio that can manage the technical capability of its distributed energy resources at the lowest possible cost. Other generalized assumptions made in the formulation of the VPP for this study include the fact that all structural capabilities of active, passive, and storage resources in terms of size and location were determined during the VPP planning stage and cannot be changed in the short term, keeping in mind that decisions made during the planning stage considered all environmental and efficiency principles in terms of energy sources and conversion technologies, particularly when using fossil fuels.

2.2 Load Profile and Distribution

Figure 3 depicts the load profile. According to the data, demand ranges from a high of 16 MW between 18:00 and 21:00 h and a low of 4 MW between 01:00 and 06:00 h and 14:00 to 17:00 h.

2.3 PDCA Implementation Framework

Figure 4 depicts the detailed framework used in the study's implementation. The PDCA cycle is a never-ending cycle of planning, doing, checking, and acting. The

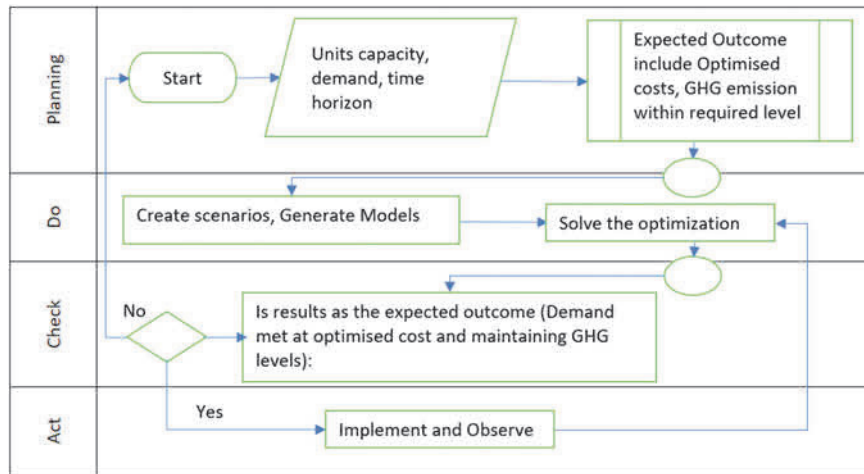


Fig. 4 PDCA implementation framework flowchart

framework in Fig. 4 has been broken down into smaller steps or development stages of the activities, and ways to improve each one has been explored.

2.4 Distributed Resources

As previously stated, the distributed resources considered for the VPP fall into two categories: (1) fossil fuel-based (diesel generators) and (2) renewable energy resources (PV, wind, and WtE). Figure 5 depicts the daily generator availability. The yellow shaded area represents low sunshine for a PV generator, amber represents low wind speed, light red indicates an emergency shutdown, dark red indicates a generator is on reliability maintenance, and blue indicates a generator is scheduled for planned maintenance.

2.5 Equations

Each unit is expected to be either available or unavailable ($u = 1$ or 0). The generated power (P_i) is between the minimum and maximum capacities. Although fossil fuel generators have a higher capacity, renewable energy is expected to contribute significantly due to low GHG emissions. The main goal is to have a power supply mix with a variety of capacities and characteristics that can contribute to demand at a low cost and in a sustainable manner. The mix should be in a proportion that strikes a balance between RE and fossil-based generation, allowing GHG emissions to be

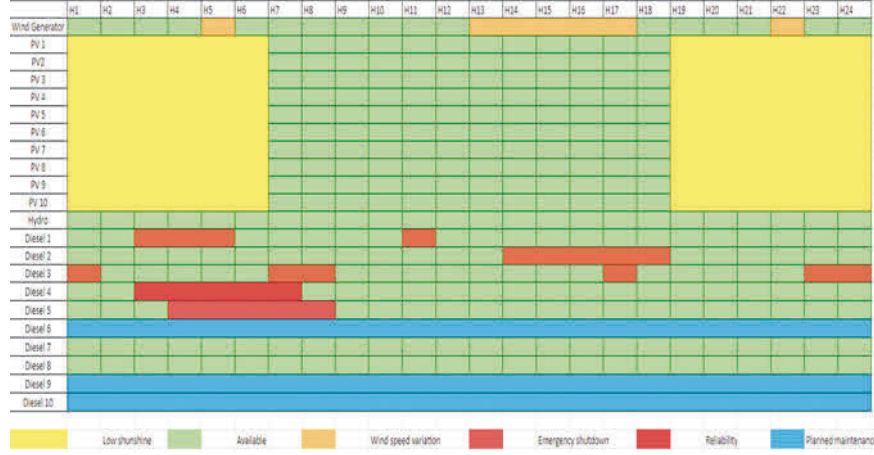


Fig. 5 VPP generator availability chart

kept to a minimum. The goal is to maximize output while keeping supply mix costs as low as possible.

(a) *Objective Function and Variables*

The objective function is made of two power components. The first power component is determined by the availability of the plant based on Fig. 5, i.e., if a unit is in operation or not at the time of the decision. The second power component is the contribution of renewable generators. They are also dependent on the amount of power generated at that period, greatly impacted by weather conditions as in Fig. 5. The objective function is formulated as in Eq. (1).

The optimization problem is presented in (1) and it is expected to maximize the total power from all generating plants. Unlike renewables and WtE, the total power expected is given in Eq. (2). Power generation for all other sources is at maximum when it is available except for diesel generators whose generation is usually between the maximum and minimum capacity as shown in (3). Constraints associated with the solution are given in Eqs. (4–6).

$$\min(P_i) \left\{ \sum_{n=t}^{N-1} P^{\text{dg}} + \sum_{n=t}^{N-1} P^{\text{reg}} + P^{\text{WtE}} \right\} \quad (1)$$

$$P_{\text{vpp}} = \sum_{n=t}^{N-1} P^{\text{dg}} + \sum_{n=t}^{N-1} P^{\text{reg}} + P^{\text{WtE}} \quad (2)$$

$$U(t) > 0 \quad (3)$$

where

P^{dg} diesel power (kW)
 P^{reg} renewable power (kW)
 P^{WtE} WtE power (kW)
 $U(t)$ availability index (1 or 0).

(b) **Constraints**

The optimization is subject to the following constraints.

$$P_{\max}^{\text{dg}} \geq P^{\text{dg}} \geq P_{\min}^{\text{dg}} \quad (4)$$

where

P_{\max}^{dg} Maximum diesel power (kW)
 P_{\min}^{dg} Minimum diesel power (kW)

$$P^{\text{reg}} = \sum_{n=t}^{N-1} P^{\text{pv}} + P^{\text{wind}} \quad (5)$$

where

P^{pv} PV power (kW)
 P^{wind} Wind power (kW).

$$0.5 = \left\{ \sum_{n=t}^{N-1} C p^{\text{dg}}(n) + \sum_{n=t}^{N-1} C p^{\text{reg}}(n) + \sum_{n=t}^{N-1} C p^{\text{Wte}}(n) \right\} \quad (6)$$

3 Results and Discussion

Results from the simulation are presented in tables. In the simulation, total power generation, VPP contribution, and renewable penetration are presented based on the constraints given. After modeling and simulation, Table 1 gives the optimal power contribution from VPP and the contribution from respective generation modes.

Table 2 gives the power distribution, renewable energy penetration, and cost. It is shown that wind and diesel contribution has been capped because of the cost constraint, while other sources were maximized. The wind has about 75% of its rated capacity as slack and diesel has about 21% as slack.

In Table 3, sensitivity analysis of the simulation showed that while some generation sources have room to adjust costs and still have an optimal condition, other

Table 1 VPP power from simulation results

S/No	Optimal power from VPP components		
	Plant	Original value	Power (MW)
1.	Total power (VPP)	0	6.333333333
2.	PV generator	0	0.4
3.	Wind gen	0	0.2
4.	WtE gen	0	1
5.	Diesel	0	4.733333333

Table 2 Power distribution with slacks

S/No	Constraints used for simulation			
	Name	Cell value	Slack	Total
1.	RE penetration < =	1.6	0	0
2.	Total cost = < =	0.5	0	0
3.	PV generator	0.4	0	0
4.	Wind generator	0.2	0.4	0.6
5.	WtE generator	1	0	0
6.	Diesel generator	4.733333333	1.266666667	6
7.	External	0	18	18

sources have absolutely no room for that. The reduced costs tell us how much the objective can be increased or decreased before the optimal solution changes.

Table 4 gives the sensitivity analysis of constraints on this table, the shadow price is an important function to reckon with. The shadow prices tell us how much the optimal solution can be increased or decreased by changing the value of the constraints with one unit.

Table 3 Sensitivity analysis of variable simulation

S/No	Sensitivity analysis				
	Name	Final value	Reduced cost	Allowable increase	Allowable decrease
1.	PV generation	0.4	0.67	1E + 30	0.67
2.	Wind generation	0.2	0	0.22	1E + 30
3.	WtE generation	1	0.22	1E + 30	0.22
4.	Diesel generation	4.73	0	1E + 30	0.5
5.	External	0	- 1.22	1.22	1E + 30

Table 4 Sensitivity analysis of constraints simulation

S/No	Sensitivity analysis					
	Name	Final value	Shadow price	Constraint	Allowable increase	Allowable decrease
1.	RE penetration < =	1.6	− 0.33333333	1.6	0.4	0.2
2.	Total cost = < =	0.5	22.22222222	0.5	0.114	0.426

3.1 Optimal Power Solution

According to the simulation results in Tables 1 and 2, the VPP's ideal power is 6.33 MW, with a 1.6 MW RE penetration. Due to its size, the diesel contribution is more than predicted, but not all of its capacity is used. Table 2 gives that 1.23 MW, or about 20% of the overall capacity for diesel generators, as well as roughly 75% of the wind capacity, are underutilized. The best power is obtained by completely utilizing other sources. This scenario can be linked to the need to keep costs at a specific level and the higher cost of power from the two sources.

3.2 Sensitivity Analysis

It is optimal to have 0.4 MW of PV generation, 0.2 MW of wind generation, 1 MW of WtE generation, and 4.73 MW of diesel generation. This solution gives the maximum VPP generation of 6.33 MW (see Table 1). This solution uses all the resources available for PV and wind at 100% (0.4 MW of capacity and 1 MW of capacity) and 33% of wind (capacity and 78% of diesel capacity).

- **Reduced Cost:** Table 3 gives how much the objective coefficients can be increased or decreased before the optimal solution changes. Only wind generator units can be increased by (0.22) based on the results, while other sources can only be decreased before the optimal value changes. As a result, if there is a need to increase any output while still maintaining the optimal solution, it may be possible to do so solely through wind generation capacity.
- **Shadow Price:** The shadow prices indicate how much the optimal solution can be increased or decreased if the constraint values (RE contribution and cost) are changed by one unit. According to Table 4, the shadow price is only valid between “ $22.2 - 0.42$ and $22.2 + 0.11$,” and anything outside of this range will cause the optimal solution to change.

4 Conclusion

This research has investigated the optimal integration of distributed resources into a VPP plant successfully. The Deming wheel (PDCA) method was used in model formulation, and the optimization was solved using mixed integer linear programming (MILP). It is demonstrated that optimal integration is possible by optimizing power and constraining cost at a specific value. The two elements that were constrained in the solution were RE penetration and contribution. The optimal solution generates 6.33 MW of power from the VPP, with a RE contribution of 1.6 MW and a cost of 0.5 \$/kW. Diesel and wind were found to contribute less to total VPP power, with wind contributing only **33%** and diesel contributing **78%**.

Acknowledgements This work was supported/funded by the Ministry of Higher Education under Fundamental Research Grant (Grant FRGS/1/2018/TK07/UTM/02/6).

References

1. Akasiadis C, Chalkiadakis G (2016) Decentralized large-scale electricity consumption shifting by prosumer cooperatives. In: ECAI. August 2016, pp 175–183
2. Vale Z, Pinto T, Morais H, Praça I, Faria P (2011) VPP's multi-level negotiation in smart grids and competitive electricity markets. In: 2011 IEEE power and energy society general meeting. IEEE. July 2011, pp 1–8
3. Elwan AA, Habibuddin MH (2021) Techno-economic analysis of a grid-connected waste to energy gasification plant: a case study. *Energy Eng* 118(6):1681–1701
4. Yang Q, Wang H, Wang T, Zhang S, Wu X, Wang H (2021) Blockchain-based decentralized energy management platform for residential distributed energy resources in a virtual power plant. *Appl Energy* 294:117026
5. Abujarad SY, Mustafa MW, Jamian JJ (2017) Recent approaches of unit commitment in the presence of intermittent renewable energy resources: a review. *Renew Sustain Energy Rev* 70:215–223
6. Emovon I (2020) A fuzzy multi-criteria decision-making approach for power generation problem analysis. *J Eng Sci* 7(2):E26–31
7. Kanagasabai L (2021) Heat transfer and simulated coronary circulation system optimization algorithms for real power loss reduction. *J Eng Sci* 8(1):E1–E8
8. Sikorski T, Jasiński M, Ropuszyńska-Surma E, Węglarz M, Kaczorowska D, Kostyła P, Leonowicz Z, Lis R, Rezmer J, Rojewski W, Sobierajski M (2019) A case study on distributed energy resources and energy-storage systems in a virtual power plant concept: economic aspects. *Energies* 12(23):4447
9. Wang X, Liu Z, Zhang H, Zhao Y, Shi J, Ding H (2019) A review on virtual power plant concept, application and challenges. In: 2019 IEEE innovative smart grid technologies-Asia (ISGT Asia). May 2019, pp 4328–4333
10. Teixeira R, Cerveira A, Baptista J (2021) Optimized management of renewable energy sources in smart grids in a VPP context. In: 2021 international conference on electrical, computer and energy technologies (ICECET). IEEE. December 2021, pp 1–6
11. Zhang G, Jiang C, Wang X (2019) Comprehensive review on structure and operation of virtual power plant in electrical system. *IET Gener Transm Distrib* 13(2):145–156
12. Othman MM, Hegazy YG, Abdelaziz AY (2015) A review of virtual power plant definitions, components, framework, and optimization. *Int Electr Eng J* 6(9):2010–2024

13. Schmidt H (2019) Explosive precursor safety: an application of the Deming cycle for continuous improvement. *J Chem Health Saf* 26(1):31–36
14. Alauddin N, Yamada S (2019) Overview of Deming criteria for total quality management conceptual framework design in education services. *J Eng Sci Res* 3(5):12–20