

Recent Progress and Future Trends on State of Charge Estimation Methods to Improve Battery-Storage Efficiency: A Review

Md Ohirul Qays, Yonis Buswig, Md Liton Hossain, *Student member IEEE*, Ahmed Abu-Siada, *Senior Member IEEE*

Abstract— Battery storage systems are subject to frequent charging/discharging cycles which reduce the operational life of the battery and reduce system reliability on the long run. As such, several Battery Management Systems (BMS) have been developed to maintain system reliability and extend the battery’s operative life. Accurate estimation of the battery State of Charge (SOC) is a key challenge in the BMS due to its non-linear characteristics. This paper presents a comprehensive review on the most recent classifications and mathematical models of the SOC estimation. Future trends of the SOC estimation methods are also presented.

Index Terms— Battery Management System (BMS), Battery Modeling, Battery Storage Efficiency, State of Charge (SOC).

I. INTRODUCTION

WITH the global trend to replace fossil fuel-based electricity generation by renewable energy sources, developing reliable energy storage systems have been prioritized in the agenda of worldwide utilities, manufacturers and researchers . Among various storage systems, batteries technology has seen a revolution during the last decade due to its low greenhouse effect, high power density and low self-discharging rate [1], [2]. Reference [3] proposed water and battery storage system for 100% renewable energy generation in Saudi Arabia by the year 2040. Li-Ion battery (LIB) has supplanted other types such as lead-acid, Ni-MH, Ni-Cd batteries because of its superior technical advantages in face of energy density factor. While LIB features high power capacity and extended life cycle, a reliable battery energy management system (EMS) is essential to maintain its efficiency and

reliability along with its entire operational life [4]–[6].

Reference [7] presented a review on EMS for the applications of LIB in electrical vehicles (EV). In the EMS, state of charge (SOC) of the battery is a key parameter that identifies the entire operational life of the battery. Reference [8] reviewed various methods of the SOC estimation for EV applications. BMS observes the state of the battery cells and employs several algorithms to normalize the charging-discharging process precisely. References [9] and [10] presented various SOC estimation techniques for LIB and suggested some guidance for future research. SOC estimation can identify the maximum charging-discharging process to maintain the consistency and extend the effective life of the battery along with improving the State of Health (SOH), State of Function (SOF) and body-temperature [11].

II. BATTERY MODELING

A linear discrete-time state-space procedure is necessary to estimate the SOC of the battery as shown in Fig. 1a and the below equations:

$$x_{p+1} = A_p x_p + B_p u_p + w_p \quad (1)$$

$$y_p = C_p x_p + D_p u_p + v_p \quad (2)$$

Where, $x_p \in \text{real number } R^n$ is the system state vector at discrete-time index p , $u_p \in R^n$ is the system input, $w_p \in R^n$ is unmeasured stochastic “process noise” which distresses the system state, $y_p \in R^n$ is the system output as well as $v_p \in R^n$ is the measurement noise that affects the model output. A_p, B_p, C_p, D_p represent the dynamics of the system that depend on specific time-varying battery model.

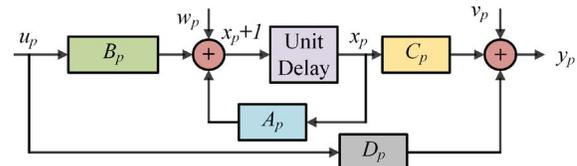


Fig 1a. Linear discrete-time system

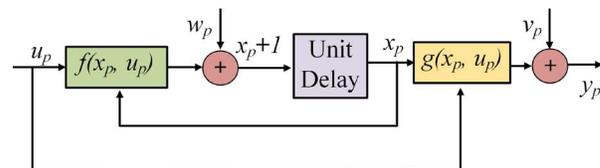


Fig 1b. Nonlinear discrete-time system

This paragraph of the first footnote will contain the date on which you submitted your paper for review.

The author would like to acknowledge the financial support rendered by research and innovation management center (RIMC) UNIMAS through Fundamental Research Grant Scheme FRGS/1/2017/TK10/UNIMAS/03/1, Ministry of Higher Education, Malaysia.

Md Ohirul Qays. (corresponding author, e-mail: 18020101@siswa.unimas.my) Yonis Buswig, (byonis@unimas.my) are with Department of Electrical and Electrical Engineering, Faculty of Engineering, Universiti Malaysia Sarawak, Kota Samarahan, Sarawak, Malaysia.

Md Liton Hossain (mdliton.hossain@postgrad.curtin.edu.au) and Ahmed Abu-Siada (A.AbuSiada@curtin.edu.au) are with Department of Electrical and Computer Engineering, Curtin University, Kent Street, Bentley, Perth 6102, WA, Australia